



RJ1912H Pulse cell short circuit analyzer

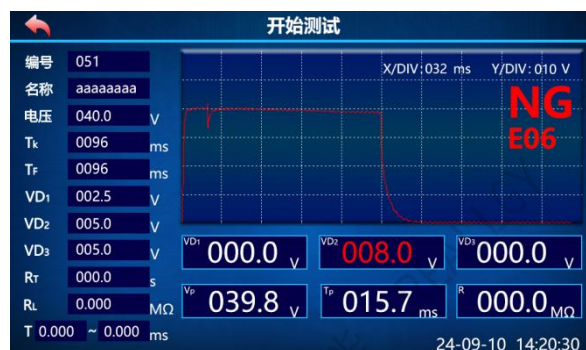

Product Description

RJ1912H pulse cell short circuit analyzer is a special instrument used for Hi-pot test before liquid injection, which can effectively identify short circuit and micro short circuit inside the cell. The instrument can monitor the whole process of Hi-pot test, generate the test waveform, and analyze the test process through the wave shape to confirm the cause of internal short circuit and micro short circuit. The product can be used for power battery, energy storage battery, 3C battery, super capacitor, aluminum electrolytic capacitor and other product testing.

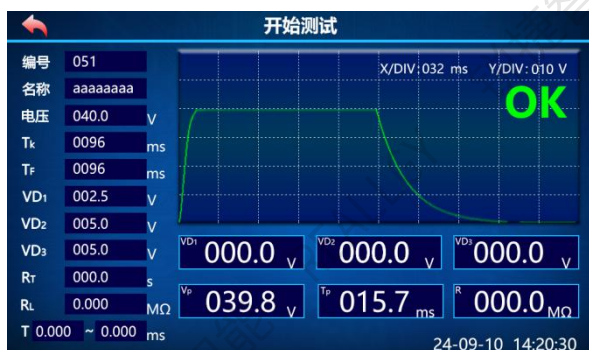

Key Features

- The whole process detection of pulse waveform can identify local transient (micro) short-circuit discharge;
- Output voltage 5.0V~1000V configurable;
- Output current 0.5mA~50mA adjustable;
- The test process can be independently segmented control, and the voltage drop in the process of voltage

全国服务热线: 4008-515-616

青岛市城阳区龙飞路 38 号

官方网址: www.ruijie-ate.com

boost, voltage holding and free discharge can be independently detected and judged;

- Fast automatic charging and discharging process, millisecond level test, high detection efficiency;
- Data storage: local storage failure test product waveform and test data, and can achieve U disk storage;

Specification

Type number	RJ1912H		
Voltage output	5.0V ~ 1000V	Minimum resolution: 0.1V	Accuracy: ±(0.5% st. + 5dgt.)
Cell capacity	120000nF		
Test time	20ms ~ 1000ms	Stride length: 1ms	Accuracy: ±(0.5% st. + 2dgt.)
Insulation resistance test range and accuracy	5.0V ~ 9.9V	2.000MΩ~100.0MΩ	±(10% rdg.+5 dgt.)
	10.0V~19.9V	0.200MΩ~200.0MΩ	±(5% rdg.+5 dgt.)
	20.0V ~ 29.9V	0.200MΩ~300.0MΩ	±(5%rdg.+5 dgt.)
	30.0V~49.9V	0.200MΩ~500.0MΩ	±(5% rdg.+5 dgt.)
	50.0V~199.9V	2.000MΩ~1.000GΩ	±(3% rdg.+2 dgt.)
	200.0V~499.9V	2.000MΩ~2.000GΩ	±(3%rdg.+2 dgt.)
	500.0V~ 1000V	2.000MΩ~3.000GΩ	±(3% rdg.+2 dgt.)
		3.001GΩ~9.999 GΩ	±(10% rdg.+2 dgt.)
	10.00GΩ~50.00GΩ	±(25% rdg.+2 dgt.)	
Insulation resistance Test time	0.3s ~ 999.9s	Accuracy: ± (0.1%st.+0.1s)	
Discharge resistance	10 k Ω		
Liquid crystal display	7 inch touch screen		
Voltage mode	Voltage maintenance, free discharge		
Extended function	Automatic detection		
External interface	Standard: PLC (switching quantity), RS232(Optional: RS485),LAN interface		
Use environment	0℃~40℃, 20%RH ~ 75%RH		
Power supply	AC100V~240V, 50/60Hz		
Net weight	6.2 kg		
Exterior dimensions	270mm×133mm×400mm (W×H×D) without foot, foot height 15mm		
Attachment	1 manual, 1 power cord (1.5m), 1 communication cable (1.5m), 1 test cable (2m), Test clip 1 set, D-type connector 1		

全国服务热线: 4008-515-616

青岛市城阳区龙飞路 38 号

官方网址: www.ruijie-ate.com